

# EasyFlow™

## MANUAL REVOLVING DOOR



EasyFlow™ manual revolving doors provide energy efficiency and high architectural appeal.

SERIES 9500



### Innovative Features and Economical Performance

Revolving doors reduce air infiltration, wind gusts, pollution and fumes from the outside in addition to improving interior climate control.

Designed for use in a multitude of applications including office and government buildings, banks, retail stores and restaurants, the **EasyFlow™** manual revolving door features our mechanical speed control for years of smooth operation.

While maintaining energy efficiency, the **EasyFlow™** manual revolving door meets architectural design requirements and provides an inviting entryway. The product is available in a variety of diameters and finishes.

### Standard Features:

- ▶ Four standard diameters (6' to 8')
- ▶ Mechanical speed control
- ▶ Round or Segmented™ drum design
- ▶ Curved tempered or laminated wall glass
- ▶ Bookfold collapsing hardware
- ▶ Flexible design
- ▶ Quick delivery on standard finishes
- ▶ Push bars or muntins

### Specifier Options:



- ▶ Finishes (Anodized aluminum, paint, metal clad, wood)
- ▶ Glazing options
- ▶ Floor speed control
- ▶ Special diameters and heights
- ▶ Aluminum roof panels
- ▶ Ceiling lights
- ▶ Glass ceiling
- ▶ Electronic speed control
- ▶ Return to quarter point
- ▶ AutoLock™
- ▶ Magnetic breakaway for high wind conditions or stadiums



# EasyFlow™


revolving doors are available with a variety of standard and optional features.

Horton doors easily accommodate a full array of design and installation needs.



**Segmented™  
Drum**


**Elevation & Floor Plan**

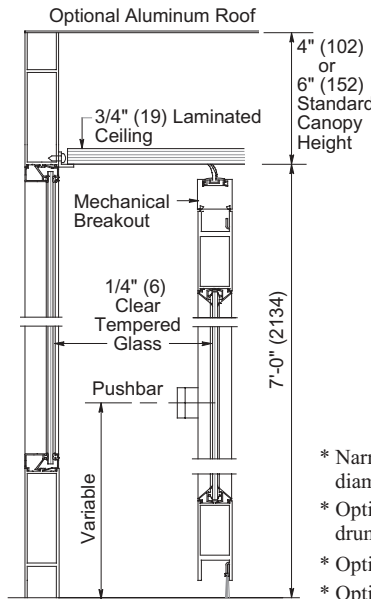

**Vertical Section**

**Standard Segmented™ Drum Dimensions**

Inside Diameter	Entry - 3 Wing	Entry - 4 Wing
6'-0" (1830)*	-----	4'-2 3/8" (1279)
6'-6" (1980)*	-----	4'-6 13/16" (1392)
7'-0" (2133)	3'-3" (995)	4'-11 3/16" (1503)
8'-0" (2438)	3'-9" (1146)	5'-7 15/16" (1725)

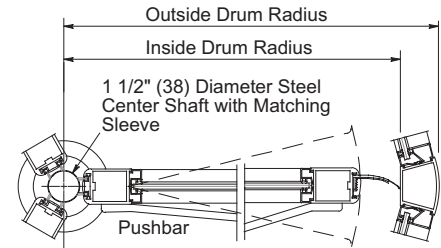


\* Narrow style shown. Medium style supplied on 8'-0" diameter doors.



\* Optional Round Canopy on Segmented™ drum enclosure

\* Optional Extended Canopy

\* Optional Magnetic Breakaway.




**Horizontal Section**



**Round  
Drum**


**Elevation & Floor Plan**

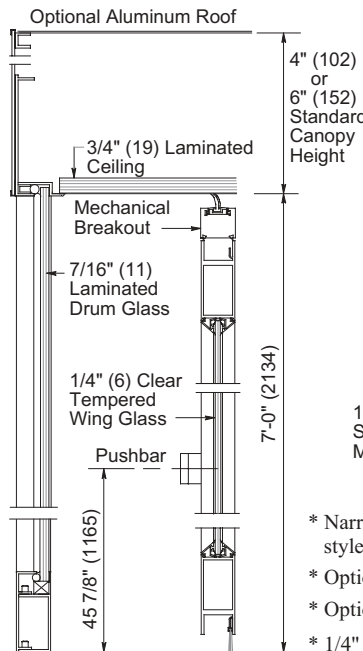

**Vertical Section**

**Standard Round Drum Dimensions**

Inside Diameter	Entry - 3 Wing	Entry - 4 Wing
6'-0" (1830)*	-----	4'-0 3/4" (1223)
6'-6" (1980)*	-----	4'-5" (1327)
7'-0" (2133)	3'-3 1/8" (994)	4'-9 1/4" (1453)
8'-0" (2438)	3'-9 1/8" (1146)	5'-5 3/4" (1653)

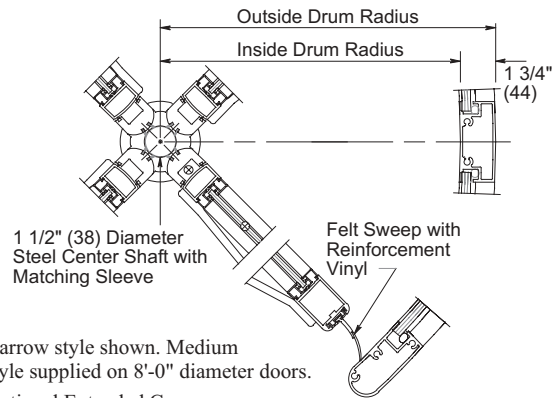

\* Narrow style shown. Medium style supplied on 8'-0" diameter doors.

\* Optional Extended Canopy

\* Optional Magnetic Breakaway

\* 1/4" (6) Tempered Glass available for Drum

**Horizontal Section**



4242 Baldwin Boulevard  
Corpus Christi,  
Texas, U.S.A. 78405-3399  
Tel: 800-531-3111, 361-888-5591  
Fax: 800-531-3108, 361-888-6510  
[www.hortondoors.com](http://www.hortondoors.com)

Horton Automatics reserves the right to alter its product and specifications without notice.

**Horton Automatics, Ltd.**  
Unit A, Hortonwood 31  
Telford, Shropshire, England TF1-7YZ  
Tel: 01952 670169, Fax: 0192 670181  
International Tel: ++44-1952-670169  
International Fax: ++44-1952-670181



A Division of Overhead Door Corporation  
A Sanwa Shutter Company

**Form F507, Rev. 1/06**  
© 2003 Horton Automatics  
Printed in U.S.A.